


# Hannoband®-3E Easy



## Our New Leading Role – for MF1 and MF2

### Properties

- Flexible use: suitable to meet all MF1 and MF2 specifications
- Easy handling due to neutral running direction
- Moisture-variable for permanently dry connection joints
- Airtight and driving rain-tight up to 1050 Pa (21.93 Psf)
- UV and weather resistant
- Assessed joint noise reduction  $RS,w$  57 dB (not plastered)
- Suitable for passive houses and new building constructions
- MPA-tested and GEG-compliant (German Building Energy Act)

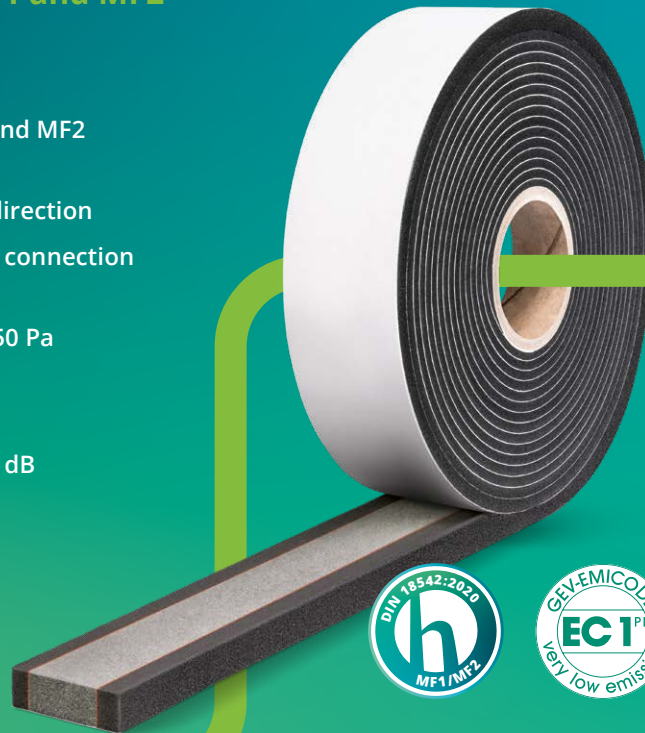

The new multi-functional tape with external HANNO high-performance membranes ensures permanently dry connection joints.


**Hannoband®-3E Easy** has been tested by MPA BAU HANNOVER and has been proven to be moisture-variable. The pre-compressed and impregnated multi-functional sealing tape is based on soft polyurethane foam. The incorporated acrylate dispersion impregnation provides the required product performance with numerous properties.

Hannoband®-3E Easy is airtight on the interior, sound and thermal insulating in the center and driving rain-tight on the exterior. The moisture-variable functional membranes adjust their water vapor permeability to the moisture load. In this way, moisture can be transported out and the joint can dry out all year round.

Depending on the compression rate, the product can be flexibly used and meets MF1 as well as MF2 requirements.

Roll format with acrylate adhesive as installation aid. For professional sealing of all functional areas in window joints with only one product.

Further information: See reverse side

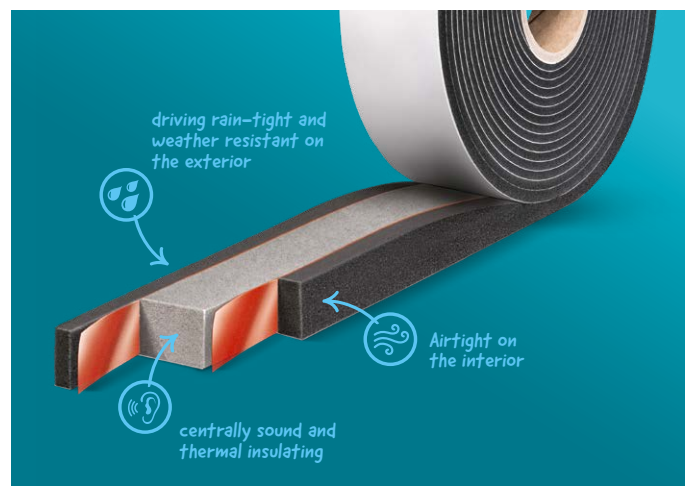

# Hannoband®-3E Easy

## Product overview

Standard colour: Anthracite, grey

Tape width (mm)	Area of application (mm)		Roll length (m)
	Concealed installation (MF2)	Directly weather exposed (MF1)	
56	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7
64	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7
74	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7
84	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7



### Hanno Werk GmbH & Co. KG

Hanno-Ring 3-5 Phone: +49 5102 7000-0  
30880 Laatzen info@hanno.com  
Germany www.hanno.com

