

Hannoband®-3E Easy



Our New Leading Role – for MF1 and MF2

Properties

- Flexible use: suitable to meet all MF1 and MF2 specifications
- Easy handling due to neutral running direction
- Moisture-variable for reliable moisture management in the joint
- Airtight and driving rain-tight up to 1050 Pa (21.93 Psf)
- UV and weather resistant
- Assessed joint noise reduction RS,w 57 dB (not plastered)
- Suitable for passive houses and new building constructions
- MPA-tested and GEG-compliant (German Building Energy Act)



The new multifunctional tape with external Hanno® high-performance membranes helps ensure reliable moisture management at the joint.


Hannoband®-3E Easy has been tested by MPA BAU HANNOVER and has been proven to be moisture-variable. The pre-compressed and impregnated multi-functional sealing tape is based on soft polyurethane foam. The incorporated acrylate dispersion impregnation provides the required product performance with numerous properties.

Hannoband®-3E Easy is airtight on the interior, sound and thermal insulating in the center and driving rain-tight on the exterior. The moisture-variable functional membranes adjust their water vapor permeability to the moisture load. This allows moisture to be transported outward and helps the joint dry out.

Depending on the compression rate, the product can be flexibly used and meets MF1 as well as MF2 requirements.

Roll format with acrylate adhesive as installation aid. For professional sealing of all functional areas in window joints with only one product.

Further information: See reverse side

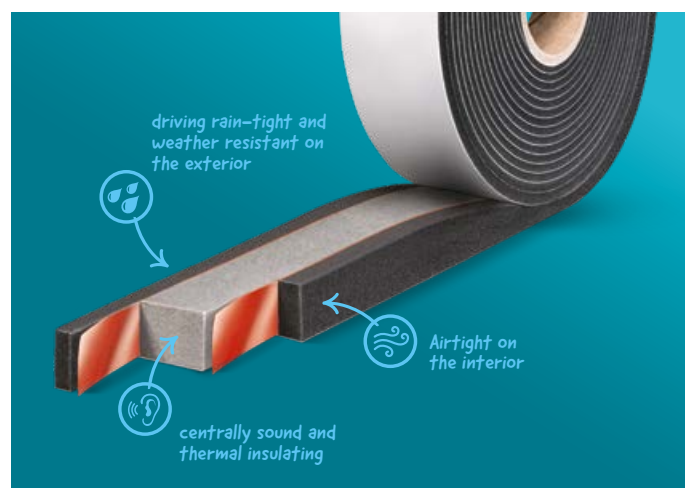

Hannoband®-3E Easy


Product overview

Standard colour: Anthracite, grey

Tape width (mm)	Area of application (mm)		Roll length (m)
	Concealed installation (MF2)	Directly weather exposed (MF1)	
56	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7
64	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7
74	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7
84	5-15	5-13	14.1
	9-22	9-18	9.4
	12-30	12-25	7
	18-40	18-35	4.7



Quick and easy installation in a variety of weather conditions



Hanno Werk GmbH & Co. KG

Hanno-Ring 3-5 Phone: +49 5102 7000-0
30880 Laatzen info@hanno.com
Germany www.hanno.com

